

LEMON STONE

— Catalogue —





612LS13R
600×1200mm



AVAILABLE SIZES
600×1200mm
600×600mm

WHITE
LS11

AVAILABLE SIZES
600×1200mm
600×600mm

TAUPE
LS13

AVAILABLE SIZES
600×1200mm
600×600mm

GREY
LS15


AVAILABLE SIZES
600×1200mm
600×600mm

MID-GREY
LS17



AVAILABLE SIZES
600x1200mm
600x600mm

WHITE
LS11

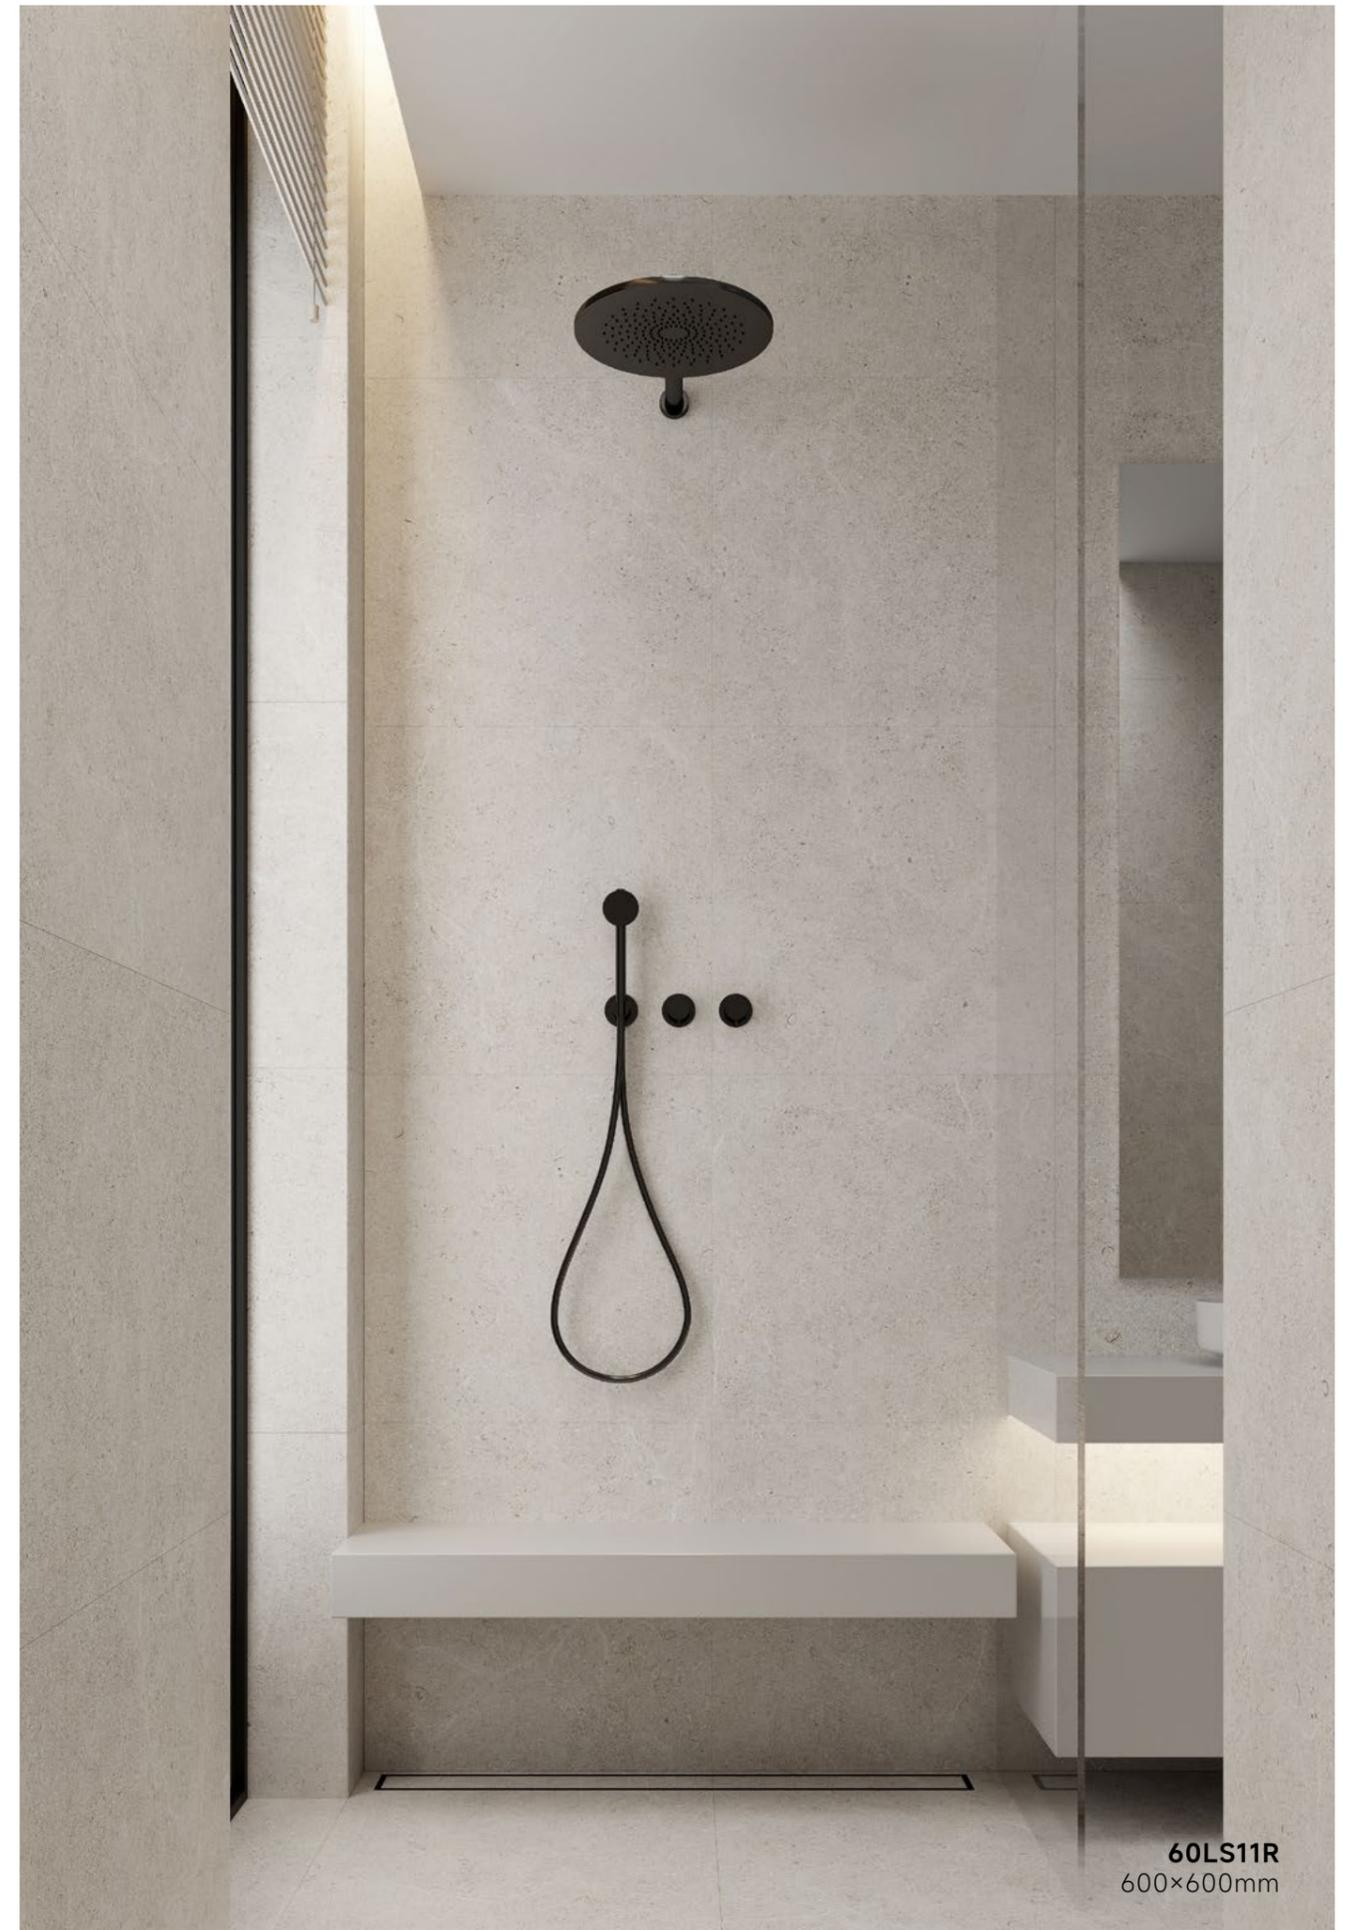

60LS11R
600x600mm




612LS11R
600x1200mm



AVAILABLE SIZES
600x1200mm
600x600mm

**TAUPE
LS13**

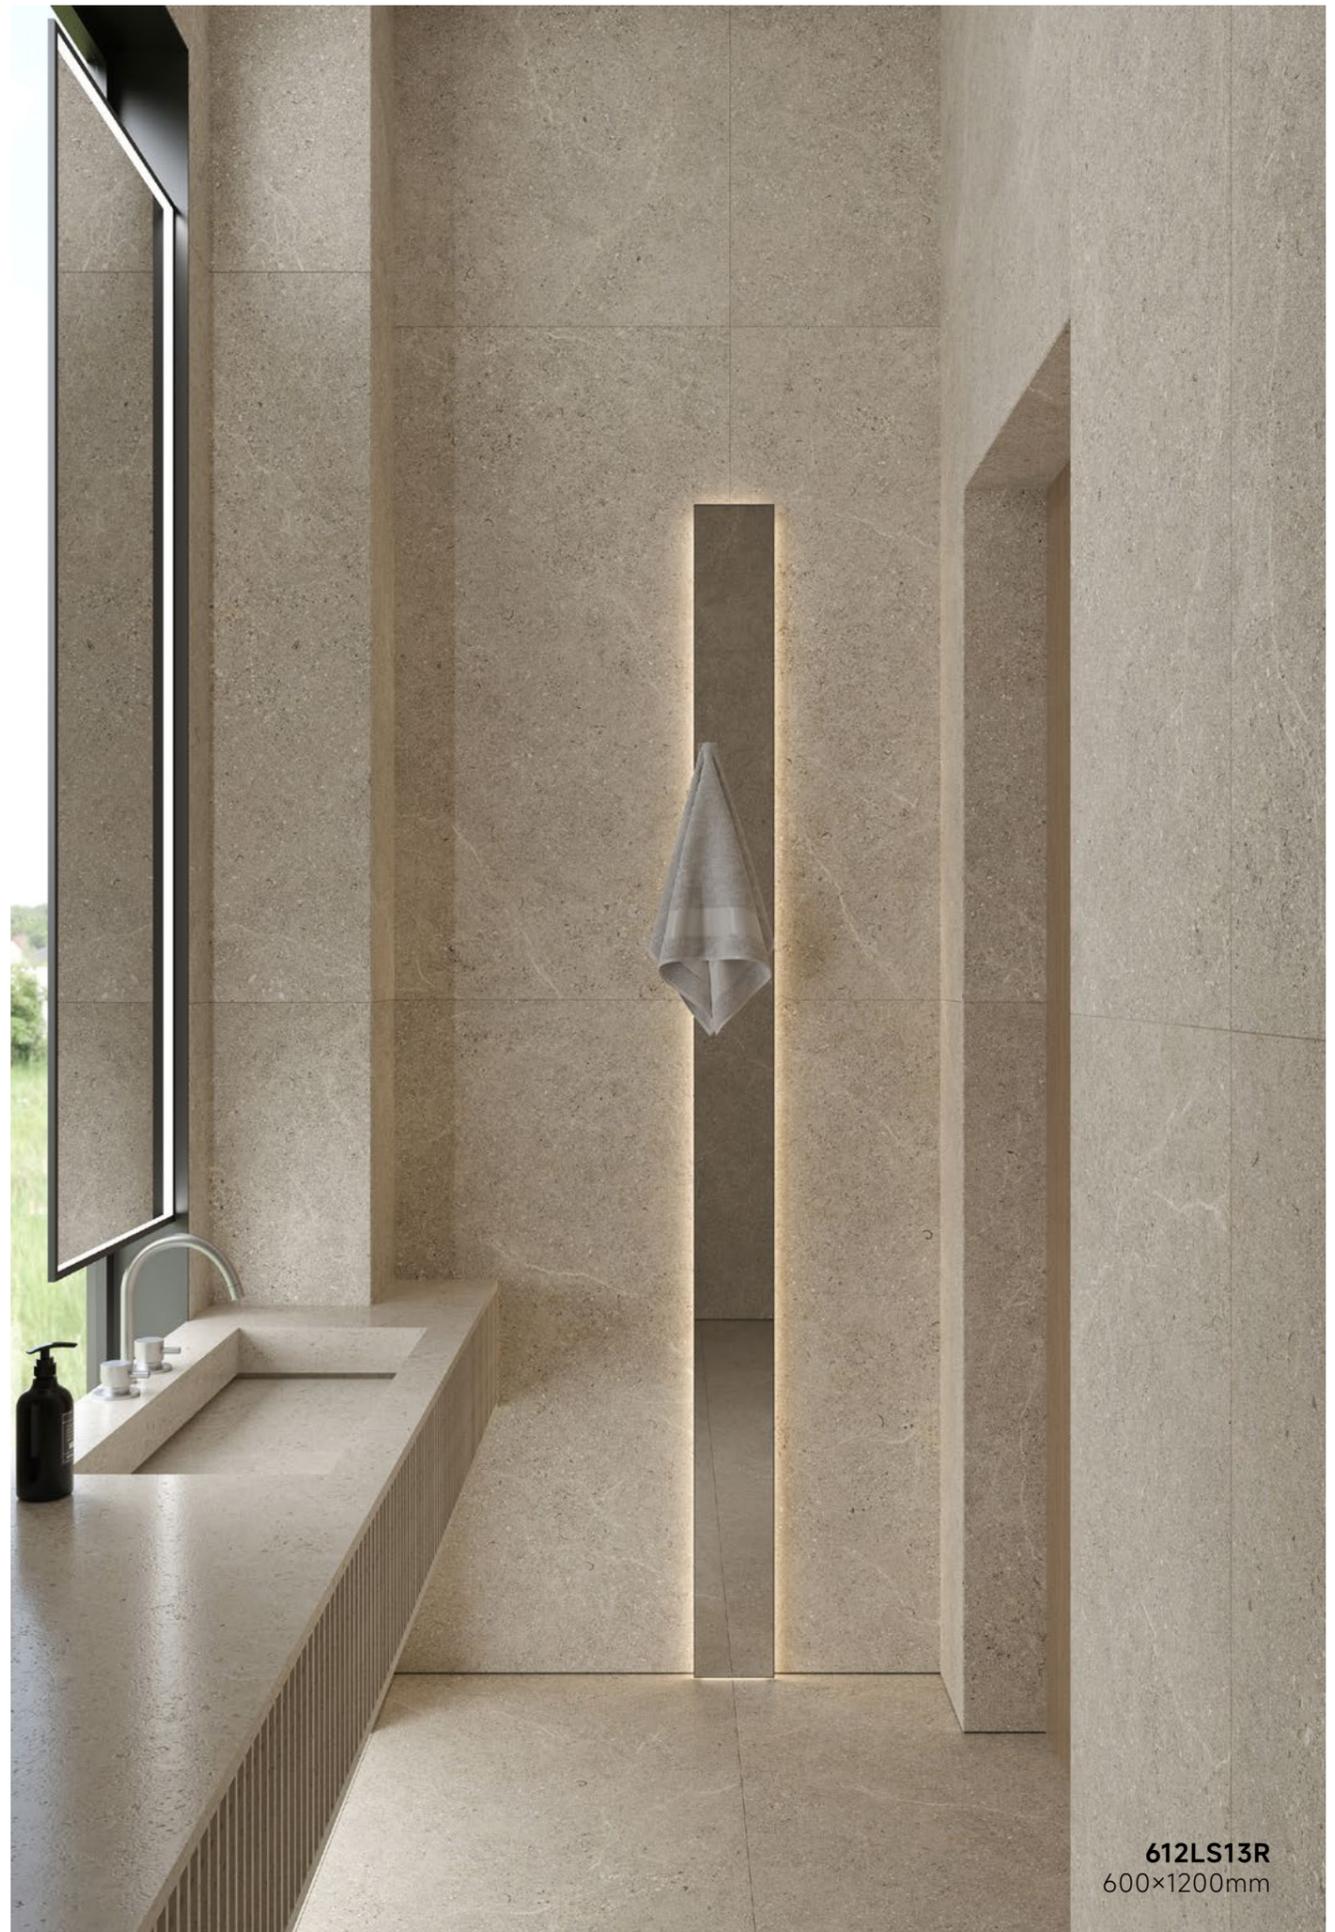

612LS13R
600x1200mm




60LS13R
600×600mm



AVAILABLE SIZES
600x1200mm
600x600mm

**GREY
LS15**

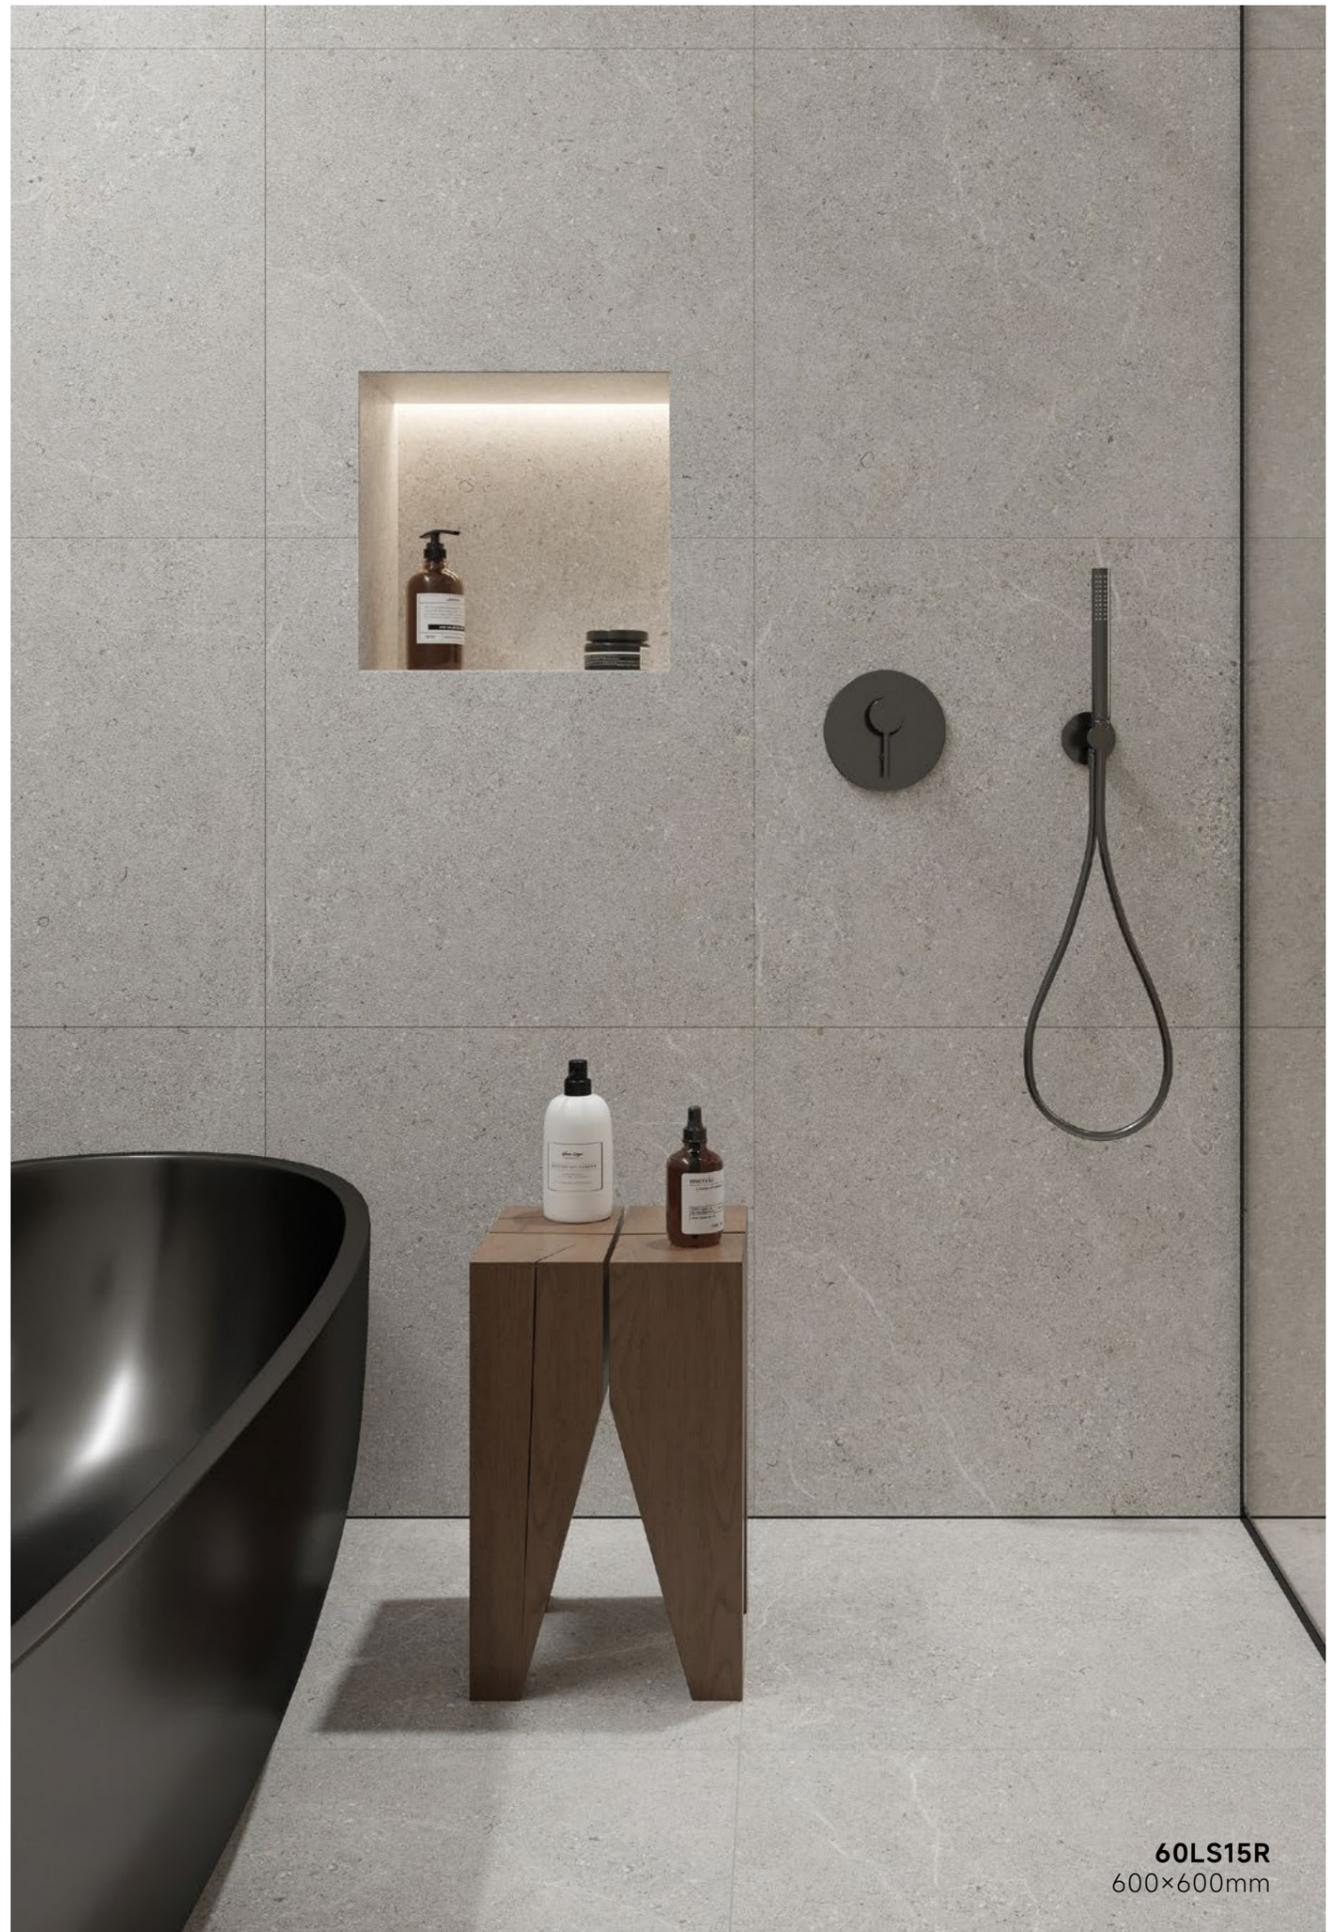

60LS15R
600x600mm



612LS15R
600×1200mm



AVAILABLE SIZES
600x1200mm
600x600mm

**MID-GREY
LS17**



60LS17R
600x600mm




612LS17R
600×1200mm

RANDOM FACES

Please note: Tile patterns are random and may not represent exactly as shown in the photo.



612LS11R WHITE | 600×1200mm 12 FACES




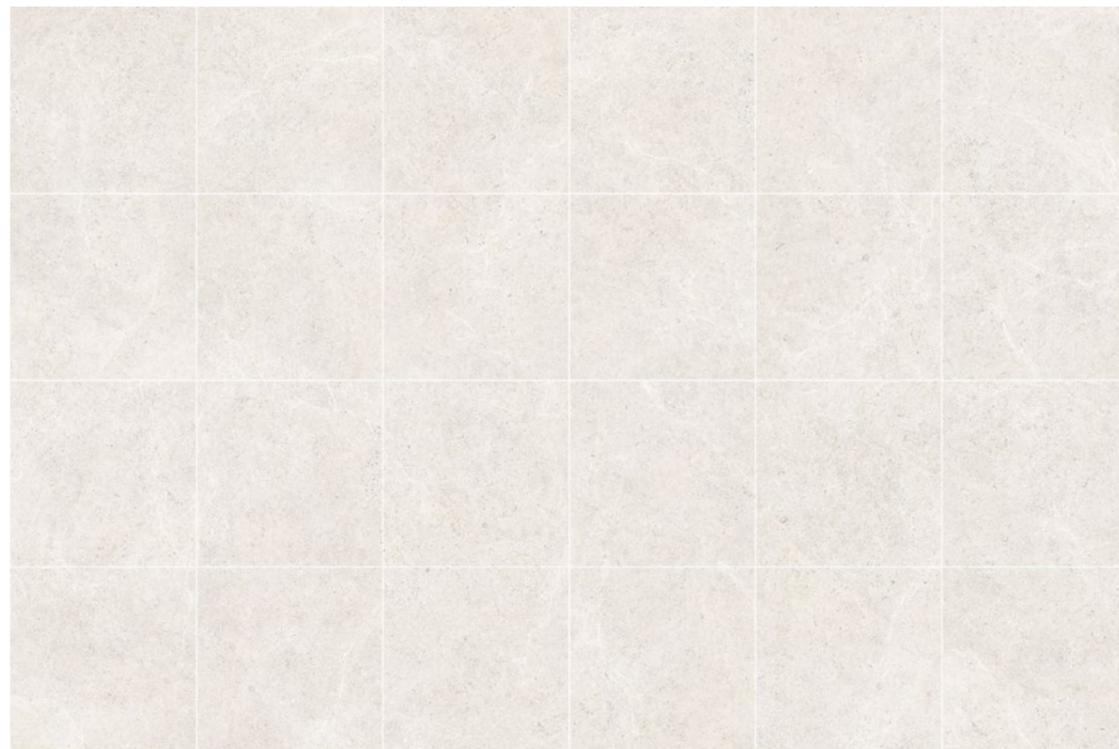


60LS11R WHITE | 600×600mm 24 FACES

SURFACE / APPLICATION / PRODUCT SUMMARY

(M) MATT
(E) EXTERNAL
(HAND) WALL TILES
(FLOOR) FLOOR TILES

(MIN. LAYING GAP 1.5mm)
(04) COLOURS
(04) SIZES
(02) FINISHES

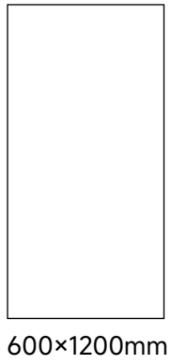

	300×300mm	300×600mm	600×600mm	600×1200mm
LS11	✓	✓	✓	✓
LS13	✓	✓	✓	✓
LS15	✓	✓	✓	✓
LS17	✓	✓	✓	✓



WHITE



TAUPE




GREY



MID-GREY

TECHNICAL SPECIFICATION

MEASUREMENT AND SURFACE APPEARANCE	STANDARD PRESCRIBED VALUES	MANUFACTURER'S VALUES (600×600mm)	MANUFACTURER'S VALUES (600×1200mm)
TECHNICAL SPECIFICATION			
Length and width	±0.6% max .	-0.03-0.03% max .	-0.03-0.03% max .
Thickness	—	9.0-9.5mm	10-10.5mm
Orthogonality	±0.5% max .	-0.06-0.07% max .	-0.06-0.07% max .
Straightness of sides	±0.5% max .	-0.06-0.07% max .	-0.02-0.03% max .
Surfaces flatness	±0.5% max .	-0.05-0.07% max .	-0.09-0.11% max .
V rating	V3	V3	V3
PHYSICAL PROPERTIES			
Water absorption	—	≤ 0.5%	≤ 0.5%
Breaking strength	≥1300N	2265N	4031N
Bending resistance	≥35N/mm ²	38N/mm ²	40N/mm ²
Resistance to deep abrasion	≤175mm ³	Class 4	Class 4
Temperature shock resistance	No visible crack	No visible crack	Durable
Resistance to frost	No visible crack	No visible crack	No visible crack
Non-slip	P3-P4	P3-P4	P3-P4
Colour resistance to light	no colour changes	no colour changes	no colour changes
CHEMICAL PROPERTIES			
Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
Resistance to staining	≥ 3	Class 5	Class 5

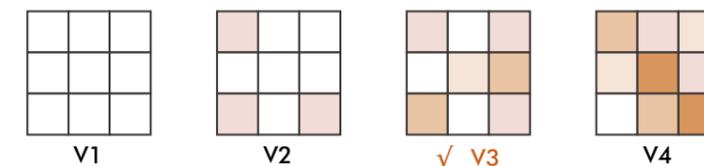

V1=Uniform Appearance
V3=Moderate Variation

V2=Slight Variation
V4=Substantial Variation

SURFACE / APPLICATION / PRODUCT SUMMARY

MATT	EXTERNAL	WALL TILES	FLOOR TILES
MIN. LAYING GAP 1.5mm	COLOURS	SIZES	FINISHES

PACKING DETAILS

SIZE	SURFACE		PCS/CTN	m ² /CTN	KG/CTN
	MATT	EXTERNAL			
600x1200mm	√		2	1.44	32
600x600mm	√	√	4	1.44	31.5
600x300mm	√		8	1.44	31.5
300x300mm	√		11	0.99	20